

Amber Plug-in

Sandwiches • Bevande • Latticini • Prodotti freschi • Carni
Sandwiches • Drinks • Dairy • Fresh Products • Meat

H 113 • 125

P 110 (inside tank: 90)

L 93 • 125 • 187 • 250

Installazione
Plug-in

Refrigerante
R290

Refrigerazione
Ventilata

Sbrinamento
Gas caldo

**Classe di temperatura
del prodotto**

- M1 (-1/+5 °C)
- M2 (-1/+7 °C)

Classe climatica
3

Illuminazione

- LED 4000 K
- LED 5700 K
- LED Rosa

Vetro frontale
Vetro temprato

Vetri laterali

- Panoramici
- Doppio specchio

Protezione
Batticarrello inox (optional)

Chiusura posteriore

- Tenda notte
- Scorrevoli entrambi optional

Installation
Plug-in

Refrigerante
R290

Refrigeration
Ventilated

Defrost
Hot gas

**Product temperature
class**

- M1 (-1/+5 °C)
- M2 (-1/+7 °C)

Climatic class
3

Illumination

- LED 4000 K
- LED 5700 K
- LED Pink

Front Glass
Safety lift-up glass

Side Glass Panels

- Panoramic safety glass
- Double mirror

Bumper
Stainless steel (optional)

Rear closing system

- Night curtain
- Sliding doors

both systems are optional

Colori disponibili
Available colours

Interno
Inside
 RAL

Esterno
Outside
 RAL




Amber Plug-in


Amber Plug-in		93	125	187	250
		TN RV	TN RV	TN RV	TN RV
Dimensioni esterne (LxPxH) External dimensions (LxDxH)	Piedini regolabili Adjustable feet	937,5x1100x1125 mm	1250x1100x1125 mm	1875x1100x1125 mm	2500x1100x1125 mm
	Ruote Pivottanti Swivel casters	937,5x1100x1250 mm	1250x1100x1250 mm	1875x1100x1250 mm	2500x1100x1250 mm
Capacità (lorda/netta) Capacity (gross/net)	H113	126,2 lt	168,3 lt	252,4 lt	336,5 lt
	H125				
Peso (netto) Weight (net)	H113	125 kg	165 kg	250 kg	330 kg
	H125	110 kg	145 kg	220 kg	290 kg
Refrigerazione Refrigeration		Ventilata Ventilated			
Refrigerante Refrigerant		R290			
Sbrinamento Defrost		Gas caldo Hot gas			
Classe di temperatura del prodotto Product temperature class		M1 (-1/+5 °C) M2 (-1/+7 °C)			
Classe climatica Climate class		3 (25°C / 60% RH)			
Classe energetica Energy class					

DATI ELETTRICI - Dati tecnici riferiti a modelli con unità a bordo con unità condensatrice plug-in R290, illuminazione LED, chiusura porte scorrevoli in plexiglass.
ELECTRICAL DATA - Technical sheet about models with plug-in air-cooled on-board condensing unit R290, LED canopy lighting, plexiglass sliding doors closure.

Compressore (q.tà - tipologia) Compressor (q.ty - type)		1 Ermetico 1 Hermetic		2 Ermetici 2 Hermetics	
Alimentazione Power supply		230 V / 1 Ph / 50 Hz			
Assorbimento elettrico (regime) Electrical input (nominal)	H113	280 W / 1.3 A	300 W / 1,4 A	530 W / 2,3 A	550 W / 2,4 A
	H125				
Assorbimento elettrico (sbrinamento) Electrical input (defrost)	H113	260 W / 1,2 A	280 W / 1,3 A	490 W / 2,2 A	500 W / 2,2 A
	H125				

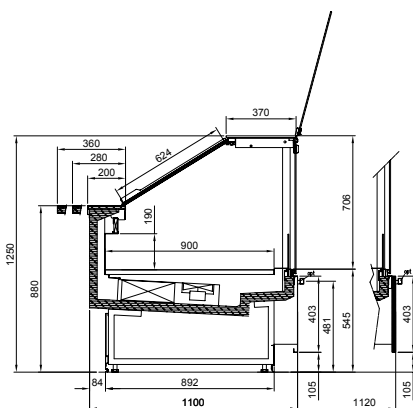

H113

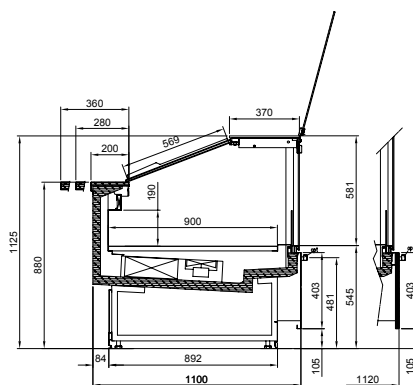

H125

